

900-1700nm 300um InGaAs PIN Photodiode**Model:NIP300****NIP300-F2****NIP300-L****Applications**

- ◆ Optical power meter
- ◆ Optical sensor
- ◆ Science analysis
- ◆ Industrial automatic control
- ◆ Space light detect

Features

- ◆ Top illumination Planar PIN PD
- ◆ Low dark current, High reliability
- ◆ Active area diameter 300um
- ◆ Hermetical TO46 Can


Absolute Maximum Ratings (Tc=25°C)

Parameter	Symbol	Unit	value
Storage temperature	Tst	°C	-40 ~ +100
Operating temperature	Top	°C	-40 ~ +85
Soldering temperature(time)	Ts (10s)	°C	260
Reverse voltage	Vr	V	10

Optical & electrical characteristics (Tc=25°C)

Parameter	Symbol	Test Conditions	Unit	value (Typ.)
Response spectrum	λ		nm	900-1700
Active area diameter	Φ		um	300
Responsivity	Re	Vr=0V, λ =1310nm	mA/mW	0.85
		Vr=0V, λ =1550nm	mA/mW	0.90
Dark current	Id	Vr=0V	nA	0.03
		Vr=5V	nA	0.4
response time	Tr	R L =50 Ω , Vr=5V	ns	1
Capacitance	Ct	f=1MHz, Vr=0V	pF	900
		f=1MHz, Vr=5V	pF	6
Reverse operating voltage	Vr		V	0-5
Reverse breakdown voltage	VBR	Id=10uA	V	30
Saturated optical power	Ps	Vr =5V	mW	5
Shunt resistance	Rsh	Vr =10mV	G Ω	0.5
Package	Hermetic TO46 Can			


Dimensions (mm)

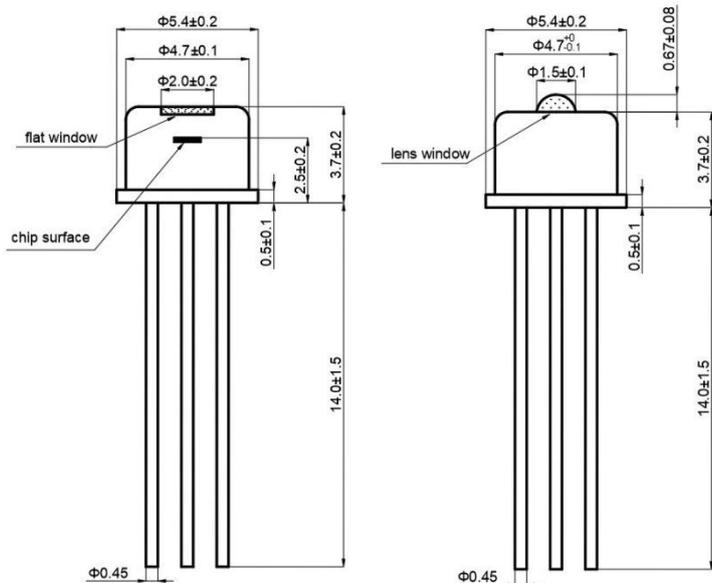


NIP300-F2

NIP300-L

Pin Assignment (Bottom View)

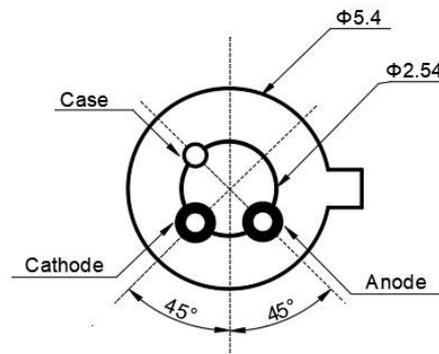

Typical responsivity curve(Tc=25°C)

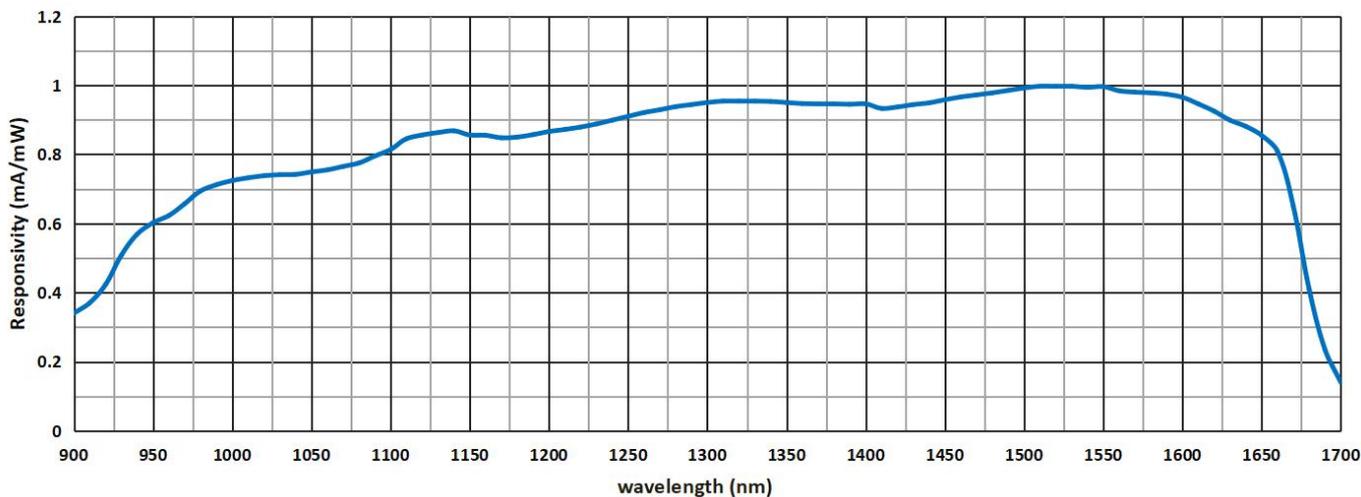

Order information

NIP300-X: N=Ninglight IP=InGaAs PD 300=300um active area diameter

X=F2: TO-46 Can with 2mm flat window cap

X=L: TO-46 Can with ball lens cap

The cautions

- 1: The above product specifications are subject to change without notice.
- 2: The suitable ESD protection is required in storage, transportation and using.